

DESCRIPTION	DRAWN	CHECKED	APPROVED
	05/28/12'		

Notes:






.Electrical  
 Rated voltage : 300V  
 Rated current : 5A  
 Contact resistance:20mΩ  
 Insulation resistance:5000MΩ/DC1000V  
 Withstanding Voltage: AC2000V/1Min  
 Wire range: 22-18AWG 1.0mm

.Mechanical

Temp.range:-40°C~+105°C  
 Torque: 0.2Nm(1.7Lb.in)  
 Strip length: 8-9mm

Product Number Code:

GSL01009-5.0-XXP-X-XXX

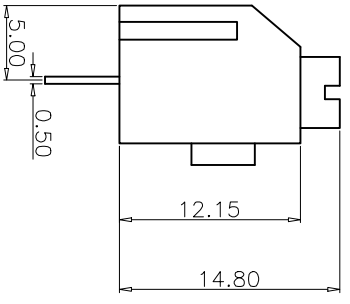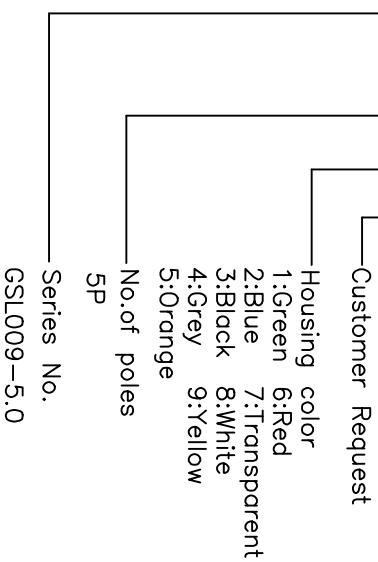

ITEM	NAME	QTY	PART.NO.	MATL.	DWG. NO.	NOTE
3	Pin header	N		Brass HR2 (Y2)		Tin plated
2	Housing		PA66	UL94 V-0		
1	Button		PA66	UL94 V-0		

GENERAL TOLERANCE	ANGLE TOLERANCE
>120	±0.50
>30~120	±0.30
>6~30	±0.20
0~6	±0.10

DRAWING TYPE	CUSTOMER
SCALE	1:1
SHEET	SHEET
DRAWING NO.	GSL009-5.0-XXP-X-XXX

**GOOSVN** 宁波高胜电子有限公司  
**NINGBO GOOSVN ELECTRONIC CO.,LTD**

PROJECTION: TITLE: PCB TERMINAL BLOCK  
 UNITS: mm PITCH: 5.0mm  
 SHEET SIZE: A4 SERIES: GSL009 SERIES