

RECOMMENDED PCB LAYOUT


NOTE:

1.MATERIAL:

- a.HOUSING:PPS
- b.CONTACT:C5191
(SURFACE PLATING:Au)

2.ELECTRIC:

- a.CONTACT RESISTANCE:30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -55°C TO 105°C

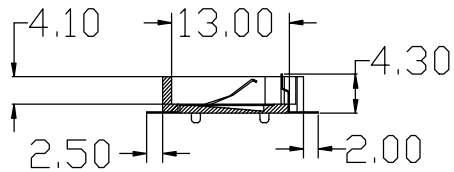

大于	止	公差值	BATTERY HOLDER:				
0	50	0.2	CR1220-2				
50	120	0.25	CUSTOMER:		DATE:		
120	250	0.3	PART NO:	MAT'L:	APPD:		
250	400	0.35	DWG NO:	Q'TY:	CHKD:		
400	650	0.5	KODEL NO:	FINISH:	DRAW:		UNIT: MM