

Specifications

A 备注 (Remark)

1. 材料 (MATERIAL)

底座: PA6T/PBT+30%G, F UL94V-0, 颜色: 白色,

Housing: PA6T/PBT+30%G, F UL94V-0, Color: White

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

B 2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information




F185-11 08 A1 B SY C 1

NO. OF PINS
PER ROW
1-40P

Contact Plating
Full Of gold
Semi-gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-Temperature

INSULATOR
MATERIAL:
A: PBT
B: PA6T
C: PA9T
D: LCP
E: Tray

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

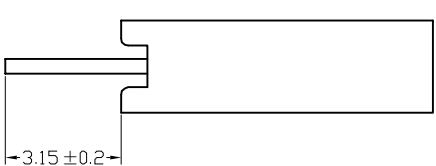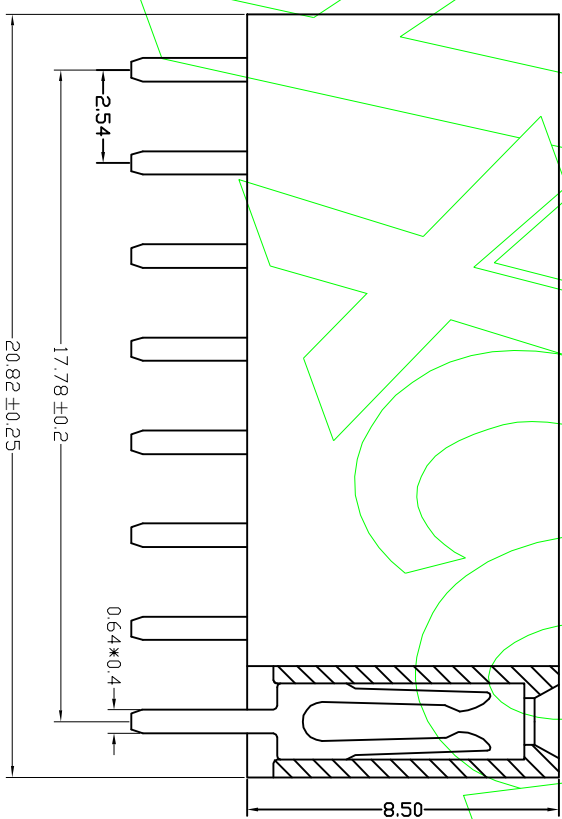

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	DESIGN	PART NO.	TITLE:
					X.X	±0.25	UNIT	MM				
					X.XX	±0.20	A4			丘康乐	F185-1108A1BSYC1	2.54mm 单排母 塑高8.5 180度 1*8P Y型 白色
					X.XXX	±0.10				CHECK		
					Angle	±3°				APPROVE		
					DIM	TOL.				APPROVE		

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.