

Specifications

A 备注 (Remark)

1. 材料 (MATERIAL)

底座: PA6T/PBT+30%G, F UL94V-0, 颜色: 黄色.

Housing: PA6T/PBT+30%G, F UL94V-0, Color: Yellow

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

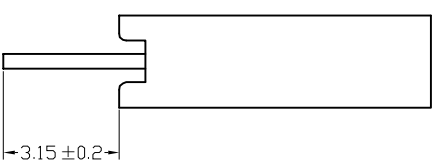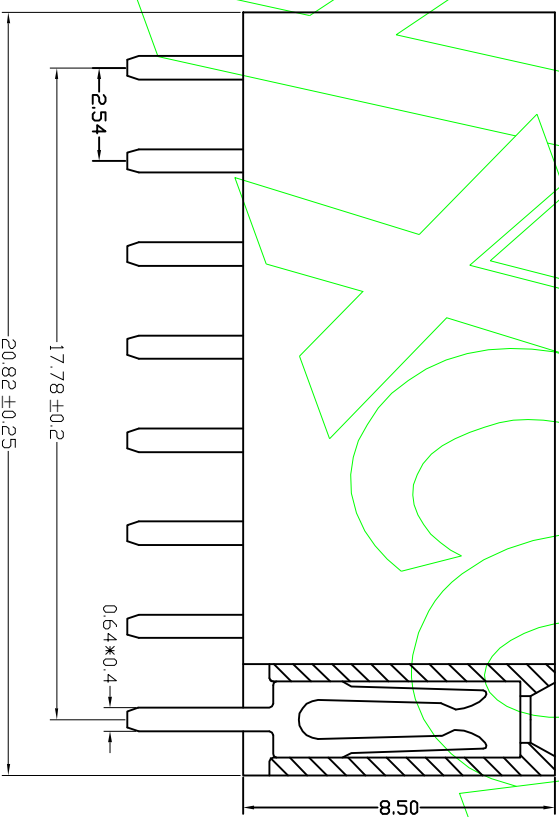

Ordering Information

F185-11 08 A1 B SY C 1



NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
1-40P	Full of gold	A: PBT	A: PE Bag
	Semi-gold	B: PA6T	B: Tape & Reel
	A0=0.8u"	C: PA9T	C: Tube
	A1=1u"	D: LCP	D: Tube+CAP
	A2=1.5u"	E: Tray	
	A3=2u"		
	A4=3u"		
	A5=5u"		
	A6=10u"		
	A7=15u"		
	A8=20u"		
	A9=30u"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-Temperature		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	DESIGN	CHECK	APPROVE	PART NO.	TITLE:	Customer No.
					X.X	±0.25	UNIT	MM							
					X.XX	±0.20	A4		丘康乐				F185-1108A1BSYC1	2.54mm 单排母 塑高8.5 180度 1*8P Y型 黄色	
					X.XXX	±0.10									
					Angle	±3°									
					DIM	TOL									

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.