

# Specifications




## 备注 (Remark)

### 1. 材料 (MATERIAL)

胶芯: PA6T +30%G, F U94V-0, 颜色: 黑色.  
Housing: PA6T +30%G, F UL94V-0, Color: Black  
四方针: 黄铜, 镀底30μ"MIN, 表面镀金1μ"MIN  
Contact: Brass, 1.00"MIN GOLD PLATING OVER ALL  
30μ" MIN NICKEL UNDERPLATING OVER ALL

### 2. 特性 (characteristics):

额定电流: 3 AMP  
Rating Current: 3 AMP.  
接触电阻: 20 mΩ MAX.  
Contact Resistance: 20 mΩ MAX.  
绝缘电阻: 1000 MΩ MIN.  
Insulating Resistance: 1000 MΩ MIN.  
耐电压: AC 500V.  
Withstanding Voltage: AC 500V.  
温度范围: -40°C to +105°C  
Temperature Range: -40°C to +105°C

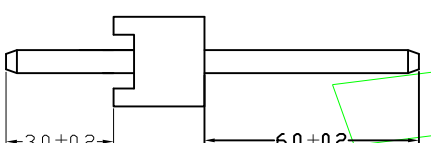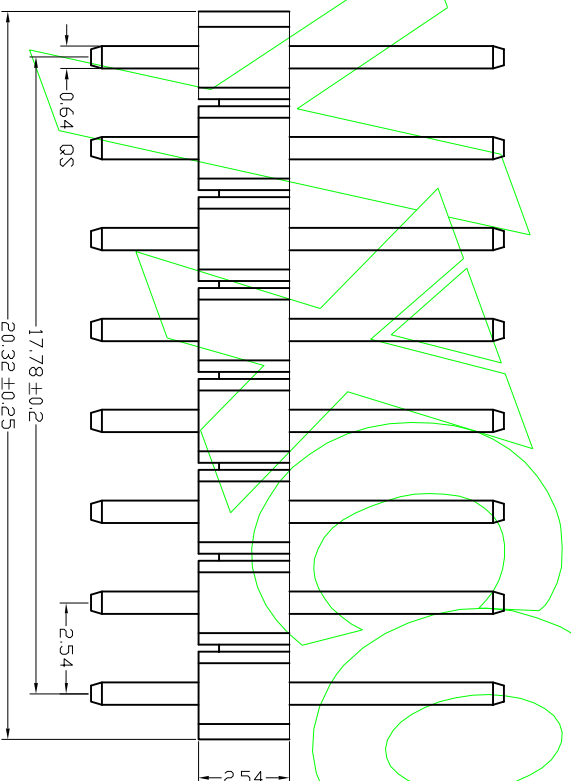

# Ordering Information

P125-11 08 A1 B S 116 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2-40P	Full of Gold	A: 0.80"	A: PE Bag
17: 1.7mm		Semi-gold	B: 0.80"	B: Tape & Reel
20: 2.0mm		PA6T	C: PA6T	C: Tube
25: 2.54mm			D: 1.00"	D: Tube+CAP
30: 3.0mm			E: 1.25"	E: Tray

S1=Ordinary Tin Plated  
S2=Matte Tin Plated  
S3=Tin-plated High-temperature

REV	DATE	MODIFICATION DESCRIPTION	OPERATION		SCALE		Fit	DESIGN	CHECK	APPROVE	PROJ.	DIM	TOL.
			X.X	±0.25	UNIT	MM							
			X.XX	±0.20	A4	DESIGN	丘康乐	PART NO.	P125-1108A1BS116A1	TITLE:	2.54mm 单排针 180度 1*8P L=11.6/3.0		
			X.XXX	±0.10	1/1	CHECK				Customer No.			
			Angle	±3°		APPROVE							
			DIM	TOL.		APPROVE							

**Yxcon** 东莞市宇熙精密连接器有限公司  
Dongguan Yuxi Electronic Co., Ltd.