

Specifications

A 备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G, F UL94V-0, 颜色: 兰色.

Housing: PA6T/+30%G, F UL94V-0, Color: Blue

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

B 2. 特性 (characteristics):

额定电流: 3 AMP

额定电压: AC 500V.

接触电阻: 20 mΩ MAX.





绝缘电阻: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

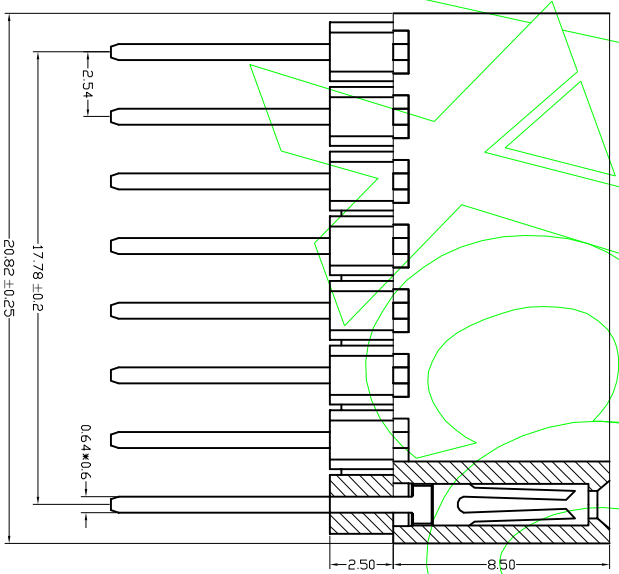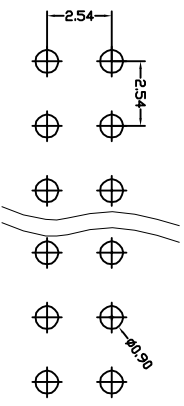

Ordering Information

F185-21 08 A1 B SY C 2

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2-40P	Full of Gold	Semi-Gold	A: PE Bag
	A0=0.8u"	B0=0.8u"	B: Tape & Reel
	A1=1u"	B1=1u"	C: Tube
	A2=1.5u"	B2=1.5u"	D: Tube+CAP
	A3=2u"	B3=2u"	E: Tray
	A4=3u"	B4=3u"	
	A5=5u"	B5=5u"	
	A6=10u"	B6=10u"	
	A7=15u"	B7=15u"	
	A8=20u"	B8=20u"	
	A9=30u"	B9=30u"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-Temperature		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	DESIGN	CHECK	PART NO.	TITLE:
					X.X	±0.25	UNIT	MM					
					X.XX	±0.20	A4			丘康乐		F185-2108A1BSYC2	2.54mm 单排母 间距8.5 加2.5 148P 180度 Y型 PC104
					X.XXX	±0.10	1/1						
					Angle	±3°							
					DIM	TOL.	PROJ.						Customer No.

Yxcon 东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co., Ltd.