
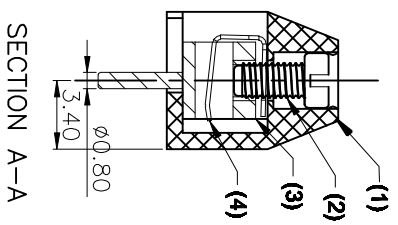
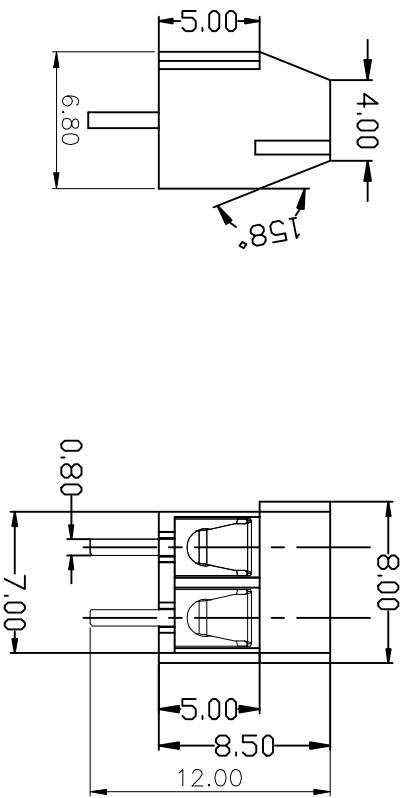


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DGS 11/10/11'		



Notes:


.Electrical  
Rated voltage : 300V  
Rated current : 7A  
Contact resistance:20mΩ  
Insulation resistance:5000MΩ/DC1000V  
Withstanding Voltage: AC2000V/1Min  
Wire range: 24-18AWG 1.0mm

.Mechanical  
Temp.range:-40°C~+105°C  
Torque: 0.2Nm(1.7Lb.in)  
Strip length: 4.5-5mm

Product Number Code:  
GS012S-3.5-XXP-X-XXX

- Customer Request
- Housing color
- 1:Green 6:Red
- 2:Blue 7:Transparent
- 3:Black 8:White
- 4:Grey 9:Yellow
- 5:Orange
- No.of poles
- 02,03P
- Series No.
- GS012S-3.50

P.C.B LAYOUT



ITEM	NAME	QTY	PART.NO.	MATL.	DWG. NO.	NOTE
4	Pin header	N		Brass		Tin plated
3	Wire guard	N		Phosphor bronze		Ni plated
2	Screws M2	N		Steel G10 22		
1	Housing	1		PA66 U94 Y-0		Zinc plated

GENERAL TOLERANCE	ANGLE TOLERANCE
>120	±0.50
>30~120	±0.30
>6~30	±0.20
0~6	±0.10

DRAWING TYPE	CUSTOMER	SHEET	1 OF	1
SCALE	1:1			
DRAWING NO.	GS012S-3.5-XXP-X-XXX			

**GOOSVN** 宁波高胜电子有限公司  
**NINGBO GOOSVN ELECTRONIC CO.,LTD**

PROJECTION: TITLE: POB TERMINAL BLOCK  
UNITS: mm PITCH: 3.50mm  
SHEET SIZE: A4 SERIES: GS012 SERIES