



标记	版本	文件编号	变更前	变更后	日期	变更人
	A		/	新版图	2013.07.25	WZW

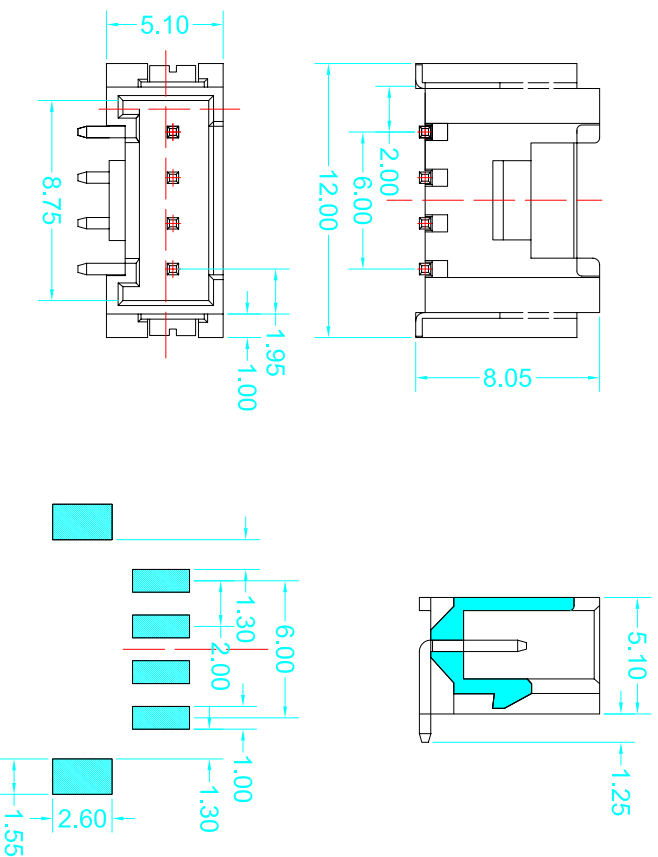

- Performance characteristics:
1. The dimension with "*" is key control size
 2. Material: PA66 94V-0
 3. Electrical requirements:
Voltage rating: 250V AC/DC
Current rating: 2A Max
Contact resistance: $\leq 10 \text{ m}\Omega$
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 800 V AC 60s
 4. Environment specification
Working temperature: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$

DRAWN		DATE		 SHENZHEN NS-TECH CO.,LTD.	
WZW		2013.07.25			
CHECKED		DATE		TITLE: 1125S-SMT-4P	
SPEC: 环保		PART NO.		CLIENT P/N	
APPROVED		DATE		UNIT: mm	
未注公差表				SCALE: free	
.X ± 0.5		X. $\pm 5^{\circ}$		REV. A	
.XX ± 0.3		.X $\pm 3^{\circ}$		BM00	
.XXX ± 0.1		.XX $\pm 1^{\circ}$			
FILE NO.: NS-1125-W00011					