

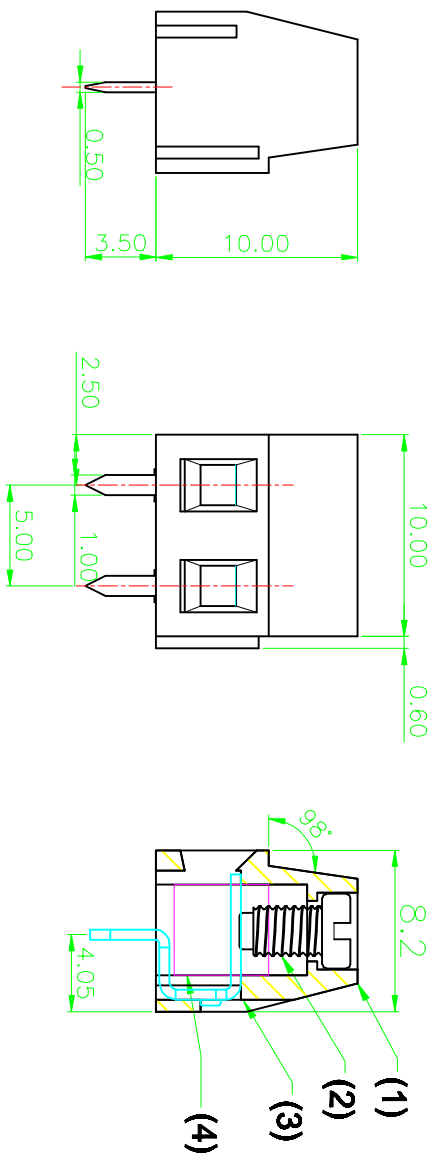


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DGS 03/07/10'		



P.C.B LAYOUT

Notes:

- .Electrical
- Rated voltage : 300V
- Rated current : 12A
- Contact resistance:20mΩ
- Insulation resistance:5000MΩ/DC1000V
- Withstanding Voltage: AC2000V/1Min
- Wire range: 26-14AWG 1.5mm*

.Mechanical

- Temp.range:-30°C~+120°C
- Torque: 0.4Nm(3.6Lb.in)
- Strip length: 4.5-5mm

Product Number Code:

GS009S-5.0-XXP-X-XXX

Customer Request

- Housing color
- 1:Green 6:Red
- 2:Blue 7:Transparent
- 3:Black 8:White
- 4:Grey 9:Yellow
- 5:Orange
- No.of poles
- 02P
- Series No.
- GS009S-5.0

ITEM	NAME	QTY	PART.NO.	MATL.	NOTE
4	Pin header	N		Brass	Tin plated
3	Wire guard	N		Stainless steel	
2	Screws M2.5	N		Steel C10 22	Zinc plated
1	Housing	1	PA06	UG4 V-0	

GENERAL TOLERANCE	ANGLE TOLERANCE
>120	±0.50
>30~120	±0.30
>6~30	±0.20
0~6	±0.10

GOOSVN 宁波高胜电子有限公司
NINGBO GOOSVN ELECTRONIC CO.,LTD

PROJECTION UNITS SHEET SIZE A4 SERIES GS009 SERIES

POB TERMINAL BLOCK
PTH: 5.00mm

DRAWING TYPE	CUSTOMER	SHEET	1 OF	1
SCALE	1:1			
DRAWING NO.	GS009S-5.0-XXP-X-XXX			