
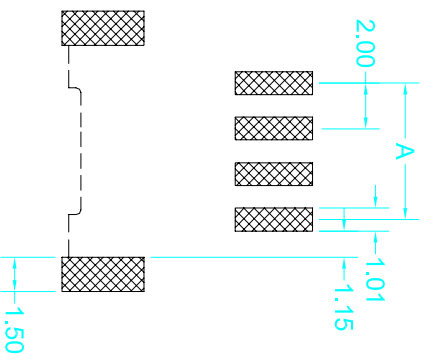
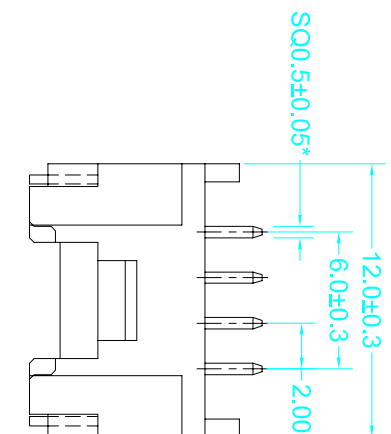
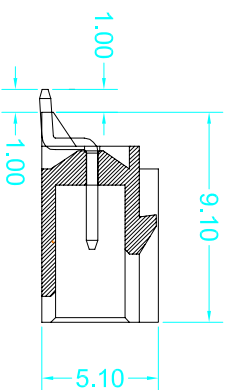



标记	版本	文件编号	变更前	变更后	日期	变更人
A			/	新版图	2013.07.25	WZW



Performance characteristics:

1. The dimension with "*" is key control size
2. Material: PA66 94V-0
3. Electrical requirements:
Voltage rating: 250V AC/DC
Current rating: 2A Max
Contact resistance: $\leq 10 \text{ m}\Omega$
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 800 V AC 60s
4. Environment specification
Working temperature: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$

DRAWN	DATE	 SHENZHEN NS-TECH CO.,LTD.
WZW	2013.07.25	
CHECKED	DATE	TITLE: 1125R-SMT-4P SPEC: 环保
APPROVED	DATE	PART NO.
未注公差表		CLIENT P/N
.X ±0.5	X. ±5°	UNIT: mm
.XX ±0.3	.X ±3°	SCALE: free
.XXX ±0.1	.XX ±1°	FILE NO.: NS-1125-W00010
		REV. A BM00