
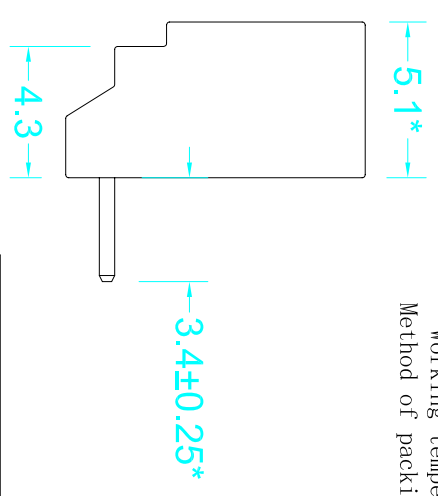
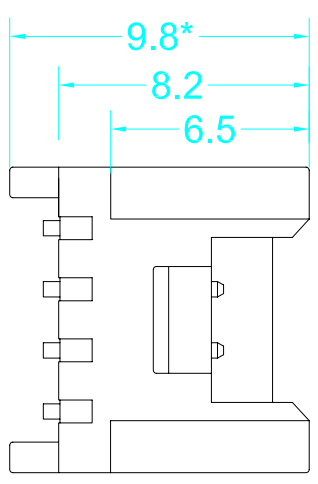



| 标记 | 版本 | 文件编号 | 变更前 | 变更后 | 日期 | 变更人 |
|----|----|------|-----|-----|------------|-----|
| | A | | / | 新版图 | 2013.07.25 | WZW |

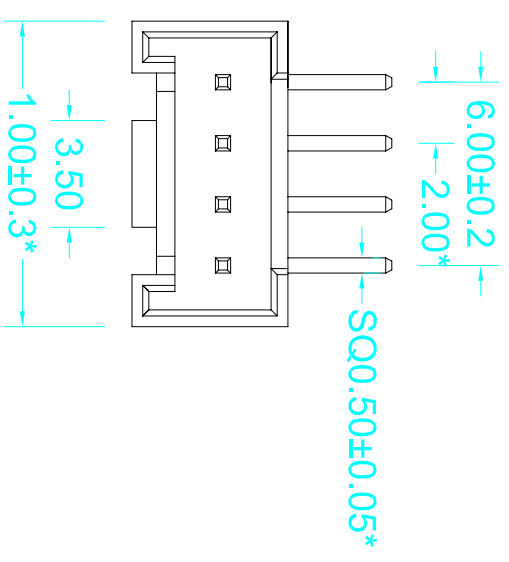

Performance characteristics:
 1. The dimensions with "*" are key control size
 2. Main body part material
 Insulator: NYLON UL94V-0
 Contact: Brass
 3. Plating
 Contact: Tin-plated according to customer needs
 4. Electrical requirements:
 Current rating: 2 A
 Voltage rating: 250V
 Contact resistance: $\leq 10\text{ m}\Omega$
 Insulation resistance: $\geq 1000\text{ M}\Omega$
 Withstanding voltage: 800 V AC, 60s
 5. Environment specification
 Working temperature: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
 Method of packing: 1000 pcs per bag

| | | | | |
|----------|------------|--|-------------|----|
| DRAWN | DATE |  SHENZHEN NS-TECH CO.,LTD. | | |
| WZW | 2013.07.25 | | | |
| CHECKED | DATE | TITLE: 1125R-4P SPEC: 不打K 环保 | | |
| APPROVED | DATE | PART NO. | | |
| | | CLIENT P/N | | |
| | | UNIT: mm | SCALE: free | |
| | | FILE NO.:NS-1125-W00007 | REV:A | HC |

| 未注公差表 | |
|-----------|---------|
| .X ±0.5 | X. ±5° |
| .XX ±0.3 | .X ±3° |
| .XXX ±0.1 | .XX ±1° |