
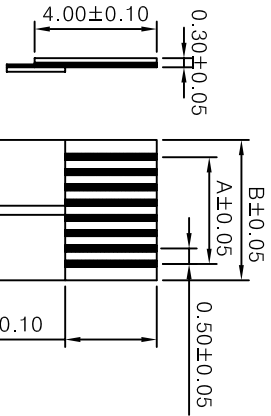

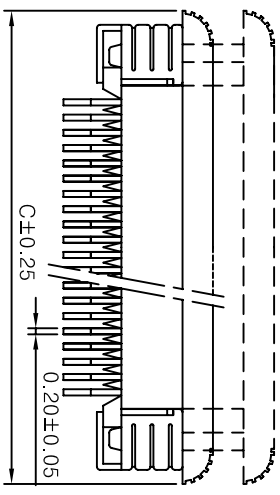
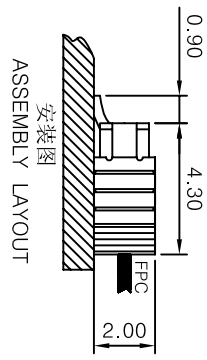


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

ROHS

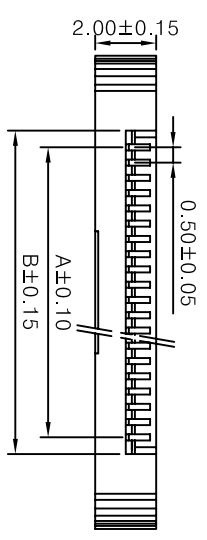

**Electrical:**  
 Current rating: 0.4 ~ 0.5 Amp max  
 Dielectric Withstanding: 250 VAC for one minute  
 Contact Resistance: < 30 mΩ  
 Insulation Resistance: > 100 MΩ  
 Operating Temperature: -25°C ~ +85°C


**Physical:**  
 Material: Nylon46, UL 94V-0  
 Contacts: Phosphor Bronze  
 Contacts plating: Tin or Gold over Nickel  
 Fixed TAB: Copper Alloy  
 Fixed TAB plating: Tin over Nickel

适用扁平电缆  
 Proper cable

Part Number:

592 0 NN 4 X 1 0 X 0

- Series No. (Pitch): 2-0.50mm
- Outline option: \_\_\_\_\_
- Number of contact: 04 ~ 40
- Type of termination: \_\_\_\_\_
- 4-Surface mount-parallel
- Contact Style: \_\_\_\_\_
- 1-Downside Contact
- 2-Upside Contact
- Packing Type: \_\_\_\_\_
- 0-Bags packing
- 1-Tape & Reel
- 2-Tube Packing
- Stitch Position: \_\_\_\_\_
- 0-standard
- 1-Tin over Nickel

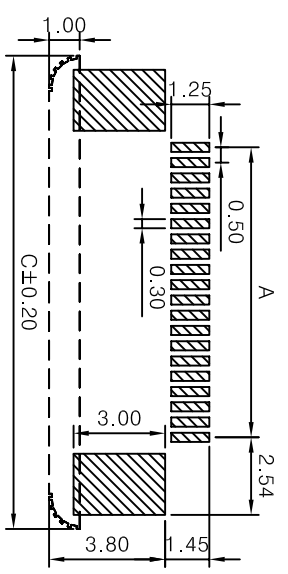

ISSUED

LEYCONN  
 CONFIDENTIAL

孔位 Poles	A	B	C	孔位 Poles	A	B	C
4	1.50	2.60	7.50	23	11.00	12.10	17.00
5	2.00	3.10	8.00	24	11.50	12.60	17.50
6	2.50	3.60	8.50	25	12.00	13.10	18.00
7	3.00	4.10	9.00	26	12.50	13.60	18.50
8	3.50	4.60	9.50	27	13.00	14.10	19.00
9	4.00	5.10	10.00	28	13.50	14.60	19.50
10	4.50	5.60	10.50	29	14.00	15.10	20.00
11	5.00	6.10	11.00	30	14.50	15.60	20.50
12	5.50	6.60	11.50	31	15.00	16.10	21.00
13	6.00	7.10	12.00	32	15.50	16.60	21.50
14	6.50	7.60	12.50	33	16.00	17.10	22.00
15	7.00	8.10	13.00	34	16.50	17.60	22.50
16	7.50	8.60	13.50	35	17.00	18.10	23.00
17	8.00	9.10	14.00	36	17.50	18.60	23.50
18	8.50	9.60	14.50	37	18.00	19.10	24.00
19	9.00	10.10	15.00	38	18.50	19.60	24.50
20	9.50	10.60	15.50	39	19.00	20.10	25.00
21	10.00	11.10	16.00	40	19.50	20.60	25.50
22	10.50	11.60	16.50				

E	Units	mm	Scale	5:1
D	Tolerance Unless			
C	Otherwise Specified			
B	Modified sizes, pls check with 77101010 as shown.			
A	RELEASED			
REV	DESCRIPTION:			

Units	mm	Scale	5:1
Tolerance Unless			
Otherwise Specified			
X ~	±0.30		
.XX ~	±0.25		
.XXX ~	±0.20		
Angle	~ ±3°		
Drawing By	XIAO XI.G	Date	2012/09/25
Reviewed By	LILIU	Date	2012/09/25
Approval By	ZH.G MIN	Date	2012/09/25

Sheet	1 of 1
Third Angle Projection	
Part No.	5920NN4X10X0

LEYCONN ELECTRONICS CO.,LTD.  
 深圳市联益康电子有限公司  
 TEL: +86(755)26078616 FAX: 26070522  
 Title: 0.5mm FPC 表贴, 卧式 H2.0mm  
 上,下接 焊脚全包式